

[www.lucevita.in](http://www.lucevita.in)

## LV 60/220-240/24 EX CV 67

### General Benefits

Compact Design  
High Surge withstanding capacity  
Long Life  
High Durability  
5 Years Warranty

### Application

Street Light  
Flood Light

### Approvals



R-71025313

Lucevita LED Power supply are with high reliability in compact housing having best surge protection, THD, Ripple Current in the industry.

Drivers generally used in Street light & Flood light luminaires for outdoor lighting application.

www.lucevita.in

## LV 60/220-240/24 EX CV 67


### Parameters

Category	Item	Technical Norm
Features	Output Type	Constant Current
	Dimming Type	NA
	Insulation Class	CLASS-II
	IP Rating	IP 65
Input	Rated Input Voltage	240V AC
	Operating Input Voltage	170-300 VAC
	Frequency	50-60 Hz
	Input Current	0.29A
	Input Power	70W
	Power Factor	>0.98
	THD	<10%
	In Rush Current Protection	YES
	Over Voltage Cutoff	320V (Toler: +/-10V)
	Under Voltage Cutoff	100V (Toler: +/-10V)
Output	Automatic Restart	290V (Toler: +/-10V)
	Output Current	2500 mA(Toler: +/-3%)
	Output Voltage	24V
	Output Power	60W
	Constant Current Accuracy	+/-3%
	Efficiency	>85%
	No Load Protection	YES
Environment & Protection	Thermal Protection	YES
	Output short circuit protection and Restart	YES
	Ambient Operating Temperature Range	-20 °C To +65 °C
	Maximum Starting Temperature	-30 °C To +75 °C
Construction	Max Case Temperature	90°C
	Input Surge Protection	4KV
	Input/Output Terminal	Wire
	Input (Cable wire) 3 core 1.0sq mm	300 mm
Others	Output (Cable) 2 core 1.0sq mm	300 mm
	Dimension	151 X 41 X 29mm (LxWxH)
	Life	>50000 Hrs

[www.lucevita.in](http://www.lucevita.in)

## LV 60/220-240/24 EX CV 67

Pictorial Representation

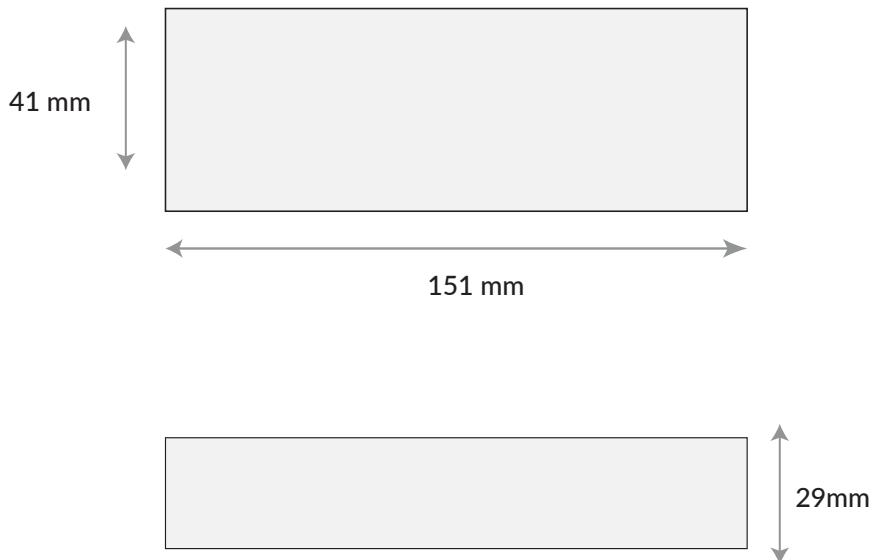

**Remarks**

1. All Parameters, if not specified, are measured at 230VAC/50Hz and 25°C ambient temperature.
2. LED Driver is a component of the luminaires, Luminaires and wire layout will affect the EMC, please check the EMC with end products again.
3. Warranty Mentioned is a limited warranty only to the original purchaser or to the first user @ Tc max from the date of manufacturing when properly installed and operated under normal conditions of use.
4. Please refer our website for details warranty conditions.
5. For further details, kindly refer our website. [www.lucevita.in](http://www.lucevita.in), or email [info@lucevita.in](mailto:info@lucevita.in).