

## LV 63/220-240/1050 CH65

### General Benefits

Compact Design  
High Surge withstanding capacity  
High Voltage withstanding capacity 440VAC  
Automatic Restart after Safe Voltage Mode  
Long Life  
High Durability  
5 Years Warranty



### Application

Street Light  
Flood Light

### Approvals



Lucevita LED Power supply are with high reliability in compact housing having best surge protection, THD, Ripple Current in the industry.

Drivers generally used in Street light & Flood light luminaires for outdoor lighting application.

www.lucevita.in


## LV 63/220-240/1050 CH65

### Parameters

Category	Item	Technical Norm
Features	Output Type	Constant Current
	Dimming Type	NA
	Insulation Class	CLASS-II
	IP Rating	IP 65
Input	Rated Input Voltage	240V AC
	Operating Input Voltage	100-300 VAC
	Frequency	50-60 Hz
	Input Current	0.29A
	Input Power	70W
	Power Factor	>0.98
	THD	<10%
	In Rush Current Protection	YES
	Over Voltage Cutoff	320V (Tole : +/-10V)
Output	Automatic Restart	290V
	Output Current	1050mA (Tole+/-3%)
	Output Voltage	40-60V
	Output Power	63W
	Constant Current Accuracy	+/-3%
	Efficiency	88%
	No Load Protection	YES
Environment & Protection	Thermal Protection	YES
	Output short circuit protection and Restart	YES
	Max Ambient Operating Temperature Range	-30 °C To +50 °C
	Minimum Starting Temperature	-30 °C To +75 °C
Construction	Max Case Temperature	85°C
	Input Surge Protection	4KV
	Input/Output Terminal	NA
	Input (Cable wire ) 3core 1.0sq mm	300 mm
Others	Output (Cable) 2 core 1.0sq mm	300 mm
	Dimension	135 X 55 X 34 mm (LxWxH)
	Life	>50000 Hrs

## LV 63/220-240/1050 CH65

### Pictorial Representation

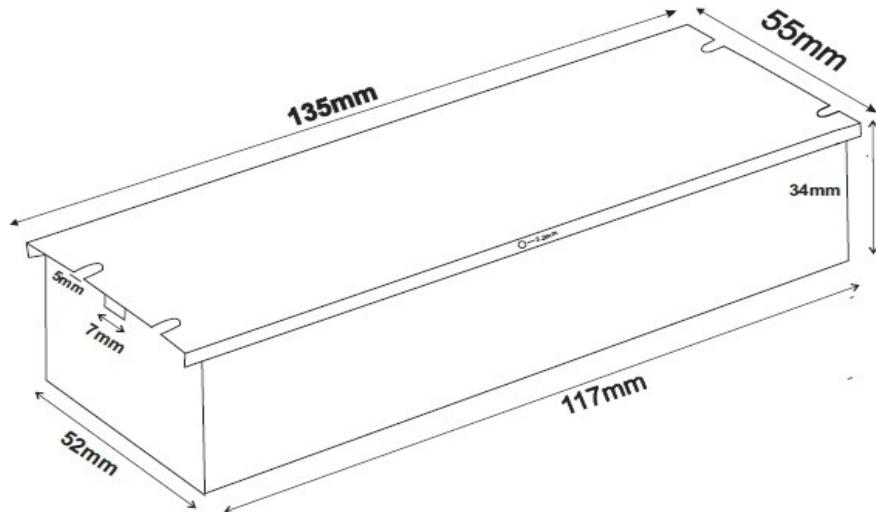

#### Remarks

1. All Parameters, if not specified, are measured at 230VAC/50Hz and 25°C ambient temperature.
2. LED Driver is a component of the luminaires, Luminaires and wire layout will affect the EMC, please check the EMC with end products again.
3. Warranty Mentioned is a limited warranty only to the original purchaser or to the first user @ Tc max from the date of manufacturing when properly installed and operated under normal conditions of use.
4. Please refer our website for details warranty conditions.
5. For further details, kindly refer our website. [www.lucevita.in](http://www.lucevita.in), or email [info@lucevita.in](mailto:info@lucevita.in).