


LV 75/220-240/1950 CH65

General Benefits

Compact Design
High Surge withstanding capacity
High Voltage withstanding capacity 440VAC
Automatic Restart after Safe Voltage Mode
Long Life
High Durability
5 Years Warranty

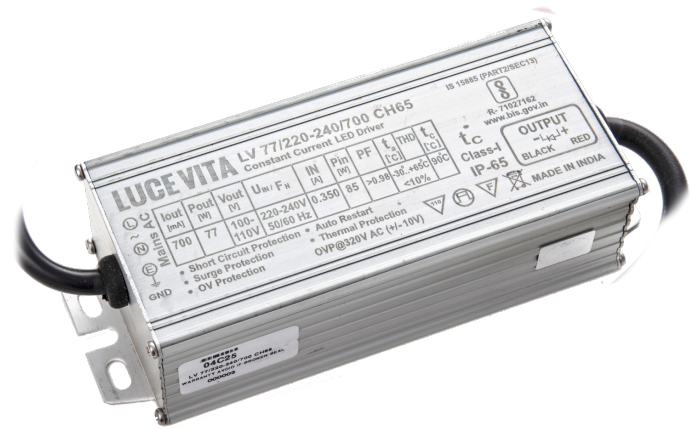

Application

Street Light
Flood Light

Approvals



Lucevita LED Power supply are with high reliability in compact housing having best surge protection, THD, Ripple Current in the industry.

Drivers generally used in Street light & Flood light luminaires for outdoor lighting application.


LV 75/220-240/1950 CH65

Parameters

Category	Item	Technical Norm
Features	Output Type	Constant Current
	Dimming Type	NA
	Insulation Class	CLASS-II
	IP Rating	IP 65
Input	Rated Input Voltage	240V AC
	Operating Input Voltage	100-300 VAC
	Frequency	50-60 Hz
	Input Current	0.33A
	Input Power	80W
	Power Factor	>0.98
	THD	<10%
	In Rush Current Protection	YES
	Over Voltage Cutoff	320V (Tole : +/-10V)
	Automatic Restart	290V
	Over Voltage Cutoff	110V (Tole : +/-10V)
Output	Output Current	1950mA (Tole+/-3%)
	Output Voltage	25-38V
	Output Power	75W
	Constant Current Accuracy	+/-3%
	Efficiency	88%
	No Load Protection	YES
	Thermal Protection	YES
Environment & Protection	Output short circuit protection and Restart	YES
	Max Ambient Operating Temperature Range	-30 °C To +50 °C
	Minimum Starting Temperature	-30 °C To +75 °C
	Max Case Temperature	85°C
Construction	Input Surge Protection	4KV
	Input/Output Terminal	NA
	Input (Cable wire) 3core 1.0sq mm	300 mm
	Output (Cable) 2 core 1.0sq mm	300 mm
Others	Dimension	135 X 55 X 34 mm (LxWxH)
	Life	>50000 Hrs

LV 75/220-240/1950 CH65

Pictorial Representation

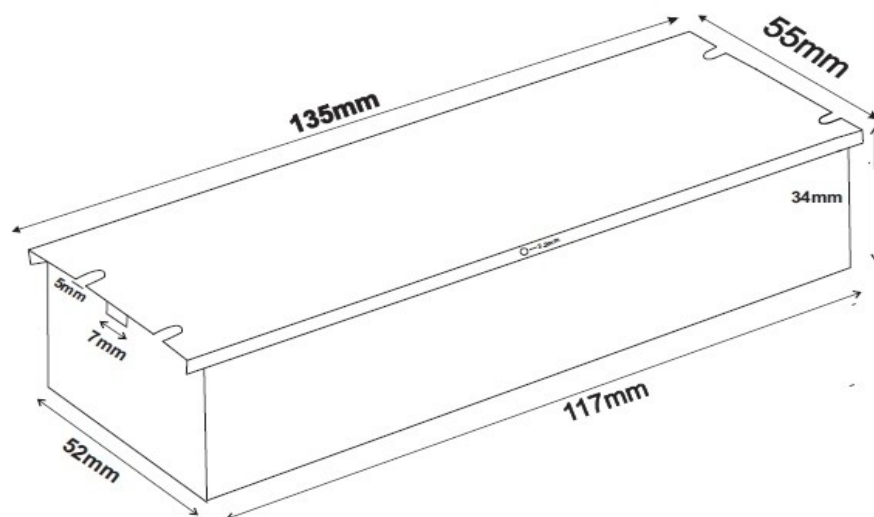

Remarks

1. All Parameters, if not specified, are measured at 230VAC/50Hz and 25°C ambient temperature.
2. LED Driver is a component of the luminaires, Luminaires and wire layout will affect the EMC, please check the EMC with end products again.
3. Warranty Mentioned is a limited warranty only to the original purchaser or to the first user @ Tc max from the date of manufacturing when properly installed and operated under normal conditions of use.
4. Please refer our website for details warranty conditions.
5. For further details, kindly refer our website. www.lucevita.in, or email info@lucevita.in.